

# PLUS **S** LINE

SMART SOLUTIONS



  
R290

CLEAN HEAT THANKS TO **TECHNOLOGY**  
THERMATEC - clean, affordable, and technological heat in your home or company



ultra-environmentally friendly refrigerant **R290**



energy **efficiency**



**inverter** technology



stable operation at **-25°C**



**super** silent



**quality** guarantee



**SG READY** function





## Heat pumps for your home

---

Our main goal is to satisfy our customers, which is why we are introducing devices made of components from renowned global manufacturers and materials that ensure long and trouble-free operation.

From the beginning of our company's operations, we have attached great importance to the appearance of our products. We believe that devices such as heat pumps, hydraulic cabinet units, or even domestic hot water tanks should be an element of good design. To meet these expectations, our devices look perfect in the context of our customers' dream homes and offices.

We attach great importance to the usefulness, quality of workmanship, and durability of our products, thanks to which we provide our customers with devices prepared for years of trouble-free and efficient operation.

## Table of contents

---

Ultra-environmentally friendly refrigerant R290 .....	04
The highest energy efficiency class A+++ .....	07
Technology & Design .....	08
Full DC inverter technology .....	10
Application and internet platform .....	11
Heat pump TH-R290-S06-1P .....	12
Heat pump TH-R290-S10-3P .....	13
Heat pump TH-R290-S16-3P .....	14

# ECOLOGY

## Ultra-environmentally friendly refrigerant **R290**



With the goal of reducing carbon dioxide emissions to the environment and limiting global warming, as THERMATEC, we use the R290 working fluid in our devices.

R290 is recognized as the working fluid with the greatest development potential in the industry. It will be the target working fluid used in the European Union.

R290 helps achieve the global goal of carbon dioxide emissions neutrality due to its ultra-low GWP level.

### Advantages of **R290** refrigerant:



It is **environmentally friendly**





It does not deplete the Earth's ozone layer (**ODP = 0**)



It does not cause the greenhouse effect (**GWP = 3**)




It has very good **thermodynamic properties**

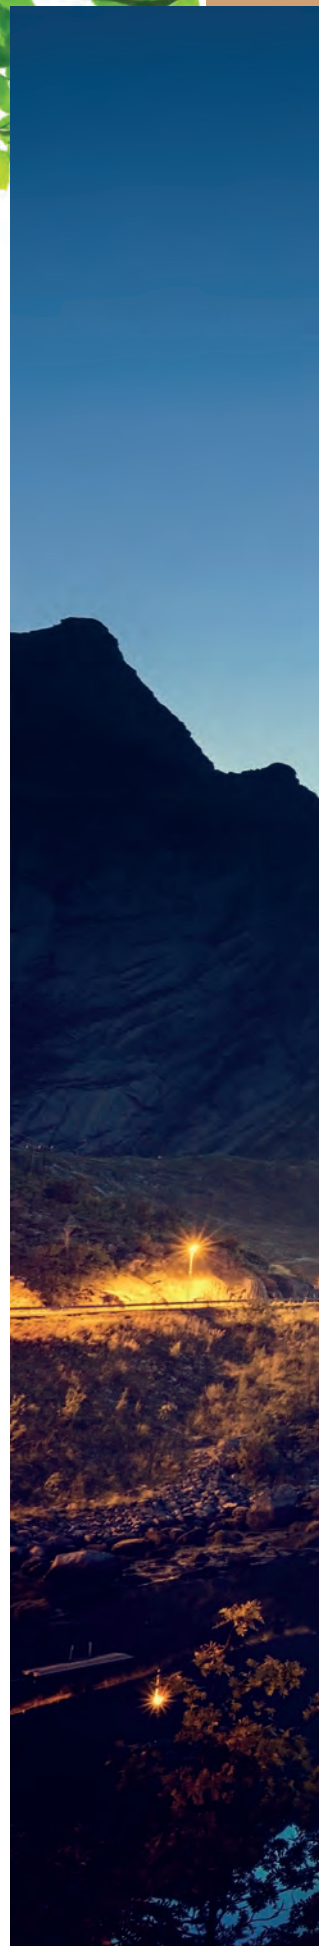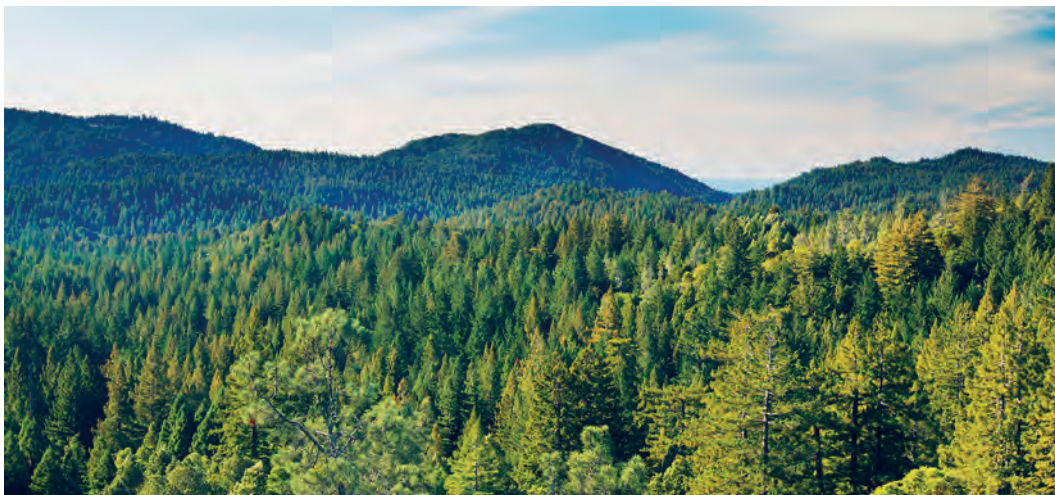



Comparison of working fluids in terms of their potential for creating the greenhouse effect GWP (Global Warming Potential).

FLUID	GWP
CO <sub>2</sub>	1
<b>R290</b>	<b>3</b>
R32	675
R134A	1430
R410A	2088

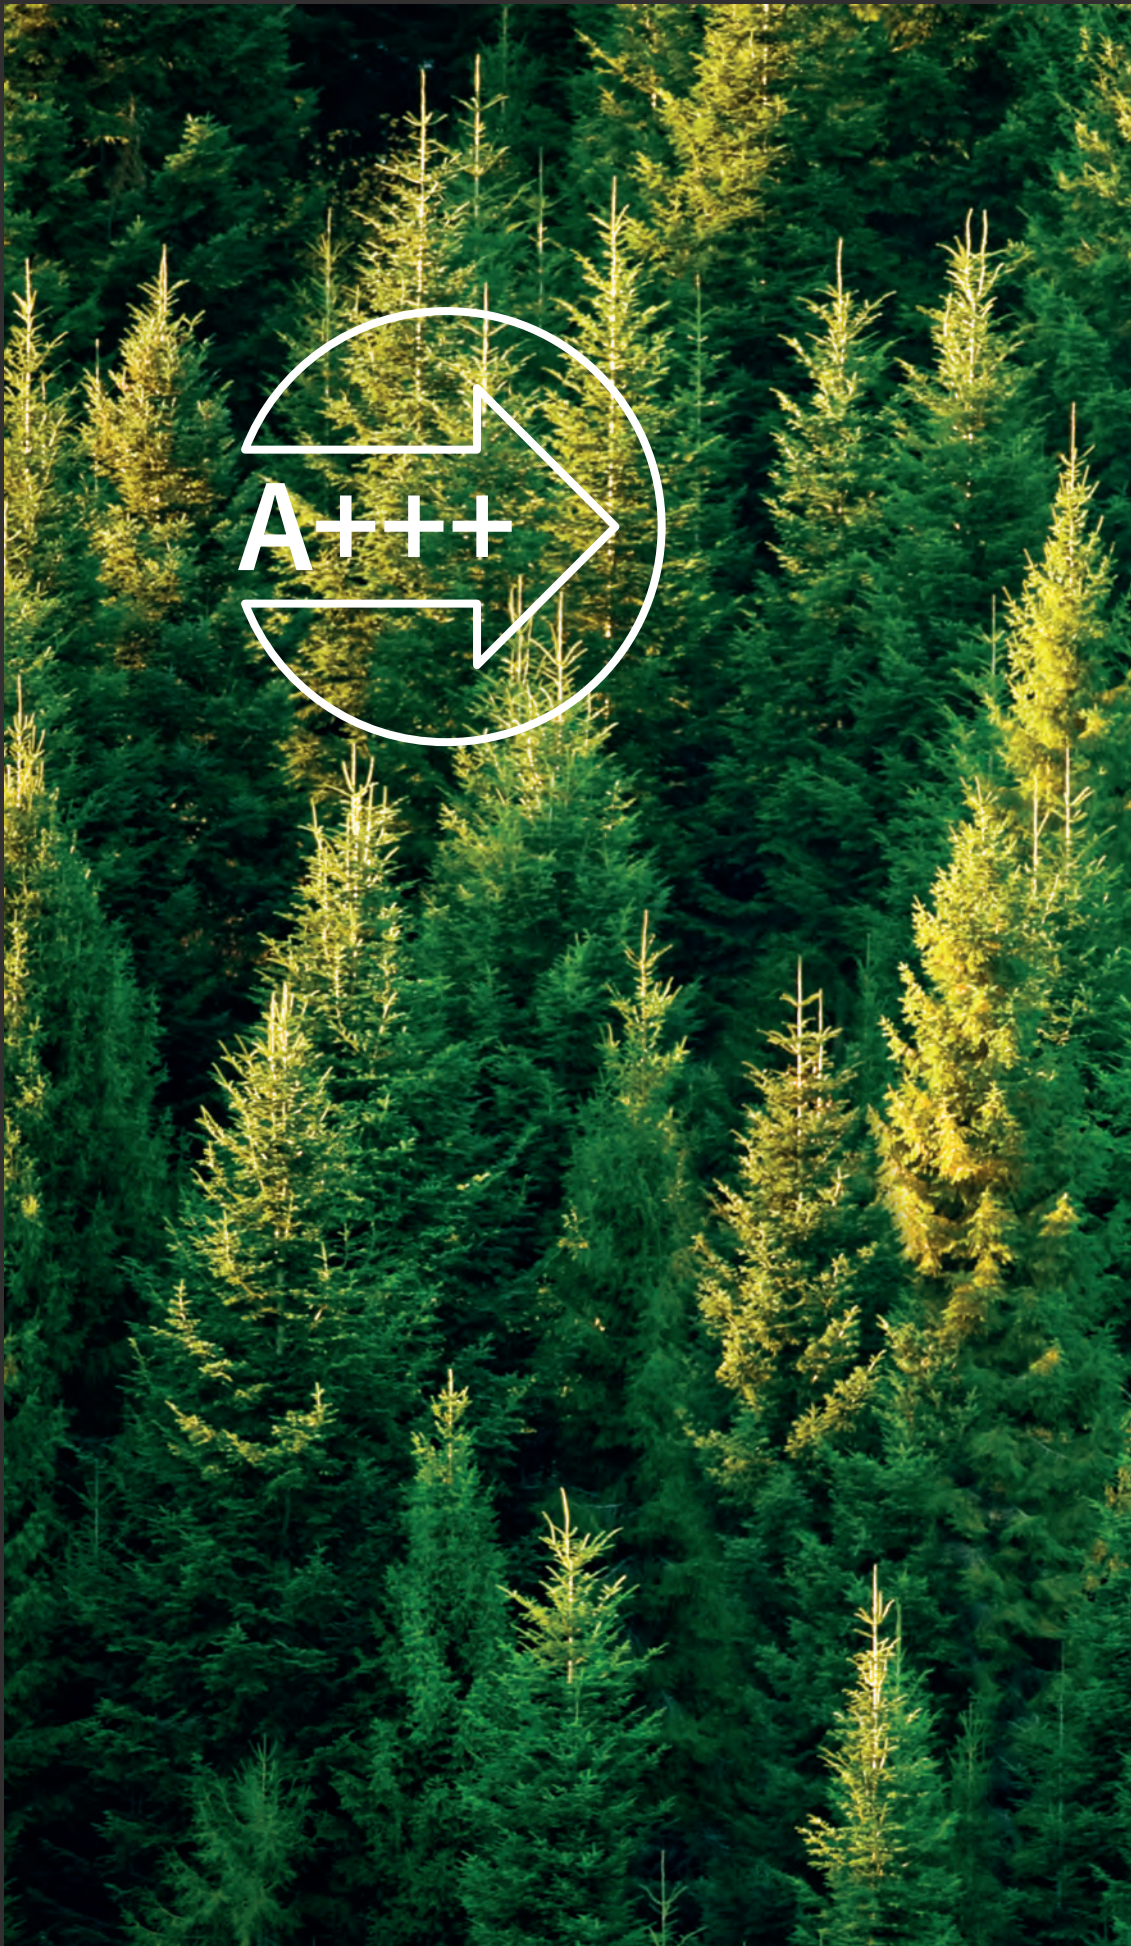




## THE HIGHEST energy efficiency class **A+++**

Excellent energy efficiency parameters of our heat pumps.

THERMATEC heat pumps have the highest energy efficiency class A+++ (for water temperatures at supply of 35°C) and A++ (for water temperatures at supply of 55°C).

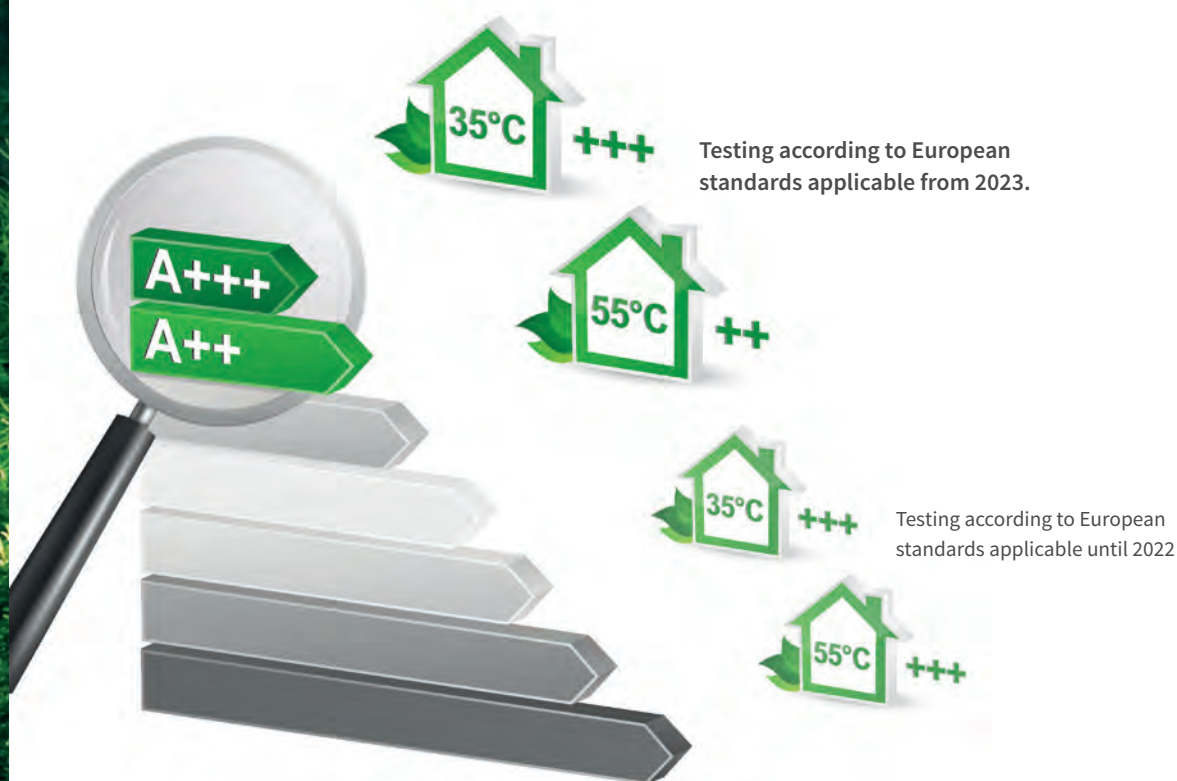

## SG READY function

The SG READY function is one of the features that is built into all PLUS S LINE heat pumps. SG READY means that the pump is ready to operate in „Smart Grid” mode, which is an intelligent network.

# TECHNOLOGY & DESIGN

The THERMATEC inverter heat pump is a combination of all modern elements. The environmentally friendly refrigerant R290, full DC inverter, quiet technology, modern design, are just some of the advantages of this powerful heat pump.



## Smart Grid function

Thanks to this function, it is possible to configure the heat pump settings in such a way as to maximize the use of excess electricity from the photovoltaic installation. An additional advantage is the option to take advantage of cheaper tariffs offered by energy suppliers.



## Control of heating zones

The ability to control two independent heating zones in the building, thanks to full control over circulation pumps and smooth regulation of the mixing valve.



## Heating curve function

The ability to set eight heating curves based on the external ambient temperature with the possibility of modifying the heating curve.



## Integrated bracket with the heat pump

The system of integrating the bracket with the heat pump excludes the need to purchase separate mounting systems. It also allows for the use of a full enclosure, which creates a modern design.



## Smart Touch display

The Smart Touch intelligent touch controller allows you to monitor and intuitively set the parameters of your heat pump's operation in real-time. The high-quality 5-inch display with high resolution makes setting adjustments very easy.



## Unique housing design

Our engineers have designed a unique housing construction that limits the unit's frosting process while making the heat pump defrosting process easier. This ensures the efficient and economical operation of the unit.





**Super silent**  
Low noise level



Sleep peacefully, our heat pumps create a super quiet environment for the user. THERMATEC uses many noise reduction technologies, and each product has been tested and optimized.




**Stable operation**  
at ambient temperature of  $-25^{\circ}\text{C}$



THERMATEC heat pumps are characterized by an exceptionally wide operating range for heating, especially at low and very low temperatures.



**Highest quality**  
components

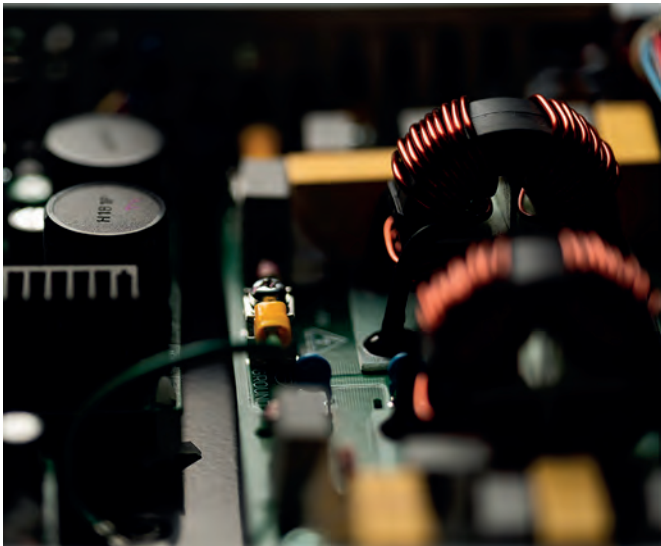

Our device contains the highest quality components from renowned brands such as HIGHLY HITACHI, GRUNDFOS, DANFOSS.



**Heat pump**  
cascade






The software allows heat pumps to be connected in a cascade of up to eight devices of the same type. This design provides full freedom in building a system with the appropriate power.

## Full DC inverter technology




THERMATEC heat pumps are based on full inverter technology. The basic benefits we get from this solution are stable and efficient operation. Additionally, combining inverter technology with R290 refrigerant allows us to achieve exceptionally favorable operating parameters for our heat pumps.

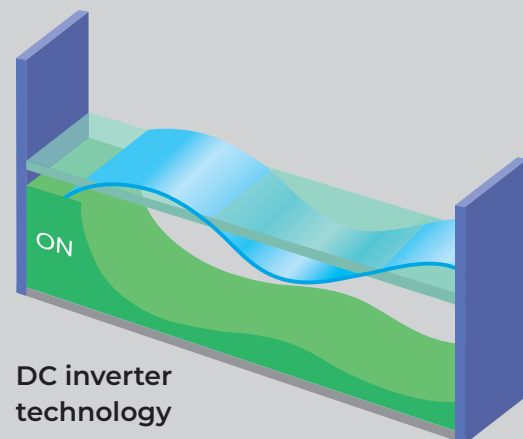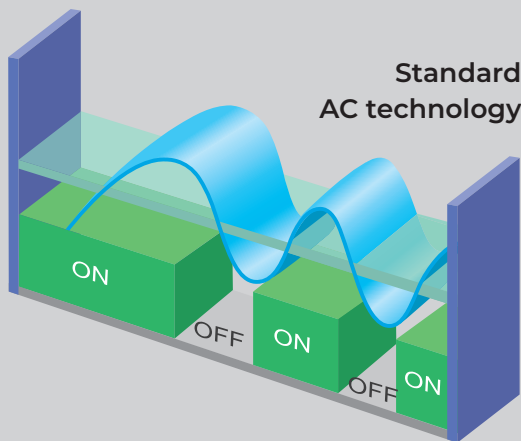

### DC inverter compressor

Compared to AC drive technology, DC technology more precisely modulates the compressor control process, which improves the efficiency of transferring power and reduces compressor noise and energy consumption.



### DC inverter motor

Thanks to better dynamic balance and reduced turbulent flow noise, the efficiency of heat pump operation is significantly improved.



## Mobile application and internet platform for installer and service technician


For even easier and remote management of the heat pump, you can use a dedicated application for IOS and Android devices.

Thanks to the built-in DTU module, in case of disruptions in the operation of the heat pump, your service technician can diagnose the device without the need for a visit and in most cases restore the proper operation of the heat pump.

Thanks to the DTU module, there is no need for connection to the home WiFi network. In areas where the internet is not available, it provides the possibility of remote service and support for the heat pump.



# Heat pump TH-R290-S06-1P

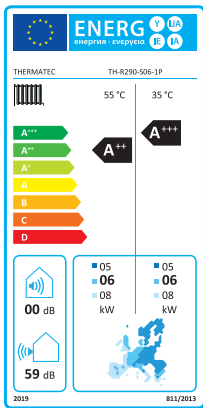

Energy label according to testing methods in line with the latest guidelines of the European Union directive from 11/2022:  
**PN-EN 14511: 2022**  
**PN-EN 14825: 2022**

**NEW 2023**



**R290**

**SECOND GENERATION**




MODEL		TH-R290-S06-1P	
Power supply			220-240V / 1N~ / 50Hz
Input power		kW	6
Heating (A7/W35)	heating capacity range	kW	2.94 – 9.00
	input power	kW	0.61 – 2.11
	input current	A	2.80 – 9.25
	COP	kW/kW	4.27 – 4.82
Heating (A7/W55)	heating capacity range	kW	3.10 – 8.12
	input power	kW	1.03 – 2.92
	input current	A	4.57 – 12.79
	COP	kW/kW	2.78 – 3.01
Cooling (A35/W12)	cooling capacity range	kW	1.42 – 5.69
	input power	kW	0.67 – 2.44
	input current	A	3.06 – 10.27
SCOP average (THW at 35°C)		kWh/kWh	4.80
SCOP average (THW at 55°C)		kWh/kWh	3.67
Rated input power		kW	3.50
Rated input current		A	15
Refrigerant TYPE / CHARGE / GWP		- / kg / -	R290 / 0.55 / 3
CO <sub>2</sub> equivalent		TCO <sub>2</sub> eq	0.0017
Operation pressure (low side)		MPa	0.8
Operation pressure (high side)		MPa	3.0
Maximum allowable pressure		MPa	3.2
Electrical shockproof		Class	I
Ingress protection		IP	IPX4
Maximum outlet water temperature		°C	75
Operating ambient temperature		°C	-25 ~ 45
Water piping connections		cal	G1
Rated water flow		m <sup>3</sup> /h	1.0
Water pressure drop		kPa	20
Water pressure (min. – max.)		MPa	0.1 – 0.3
Sound pressure (1 m)		dB(A)	44
Net dimensions (L x W x H)		mm	1287 x 529 x 1054
Net weight		kg	150
Bracket		YES	integrated

**NOMINAL TEST CONDITIONS**

Heating (A7/W35): Outdoor temperature 7°C/6°C (DB/WB) Water inlet/outlet 30°C/35°C  
 Heating (A7/W55): Outdoor temperature 7°C/6°C (DB/WB) Water inlet/outlet 47°C/55°C  
 Cooling (A35/W12): Outdoor temperature 35°C/24°C (DB/WB) Water inlet/outlet 12°C/7°C

# PLUS S LINE

## Heat pump TH-R290-S10-3P

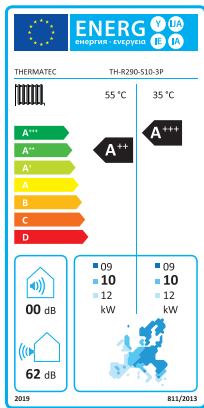

Energy label according to testing methods in line with the latest guidelines of the European Union directive from 11/2022:

**PN-EN 14511: 2022**  
**PN-EN 14825: 2022**

**NEW 2023**



**R290**

**SECOND GENERATION**



MODEL	TH-R290-S10-3P	
Power supply		380-415V / 3N~ / 50Hz
Input power	kW	10
Heating (A7/W35)	heating capacity range	kW 4.32 – 15.00
	input power	kW 0.87 – 3.73
	input current	A 1.78 – 6.04
	COP	kW/kW 4.02 – 4.97
Heating (A7/W55)	heating capacity range	kW 4.23 – 14.53
	input power	kW 1.45 – 4.28
	input current	A 2.84 – 6.78
	COP	kW/kW 2.92 – 3.39
Cooling (A35/W12)	cooling capacity range	kW 3.66 – 11.01
	input power	kW 1.12 – 3.97
	input current	A 1.97 – 6.30
SCOP average (THW at 35°C)	kWh/kWh	4.70
SCOP average (THW at 55°C)	kWh/kWh	3.62
Rated input power	kW	5.85
Rated input current	A	10
Refrigerant TYPE / CHARGE / GWP	- / kg / -	R290 / 1.05 / 3
CO <sub>2</sub> equivalent	TCO <sub>2</sub> eq	0.0032
Operation pressure (low side)	MPa	0.8
Operation pressure (high side)	MPa	3.0
Maximum allowable pressure	MPa	3.2
Electrical shockproof	Class	I
Ingress protection	IP	IPX4
Maximum outlet water temperature	°C	75
Operating ambient temperature	°C	-25 – 45
Water piping connections	cal	G1
Rated water flow	m <sup>3</sup> /h	1.72
Water pressure drop	kPa	20
Water pressure (min. – max.)	MPa	0.1 – 0.3
Sound pressure (1 m)	dB(A)	46
Net dimensions (L x W x H)	mm	1387 x 549 x 1154
Net weight	kg	170
Bracket	YES	integrated


### NOMINAL TEST CONDITIONS

Heating (A7/W35): Outdoor temperature 7°C/6°C (DB/WB) Water inlet/outlet 30°C/35°C

Heating (A7/W55): Outdoor temperature 7°C/6°C (DB/WB) Water inlet/outlet 47°C/55°C

Cooling (A35/W12): Outdoor temperature 35°C/24°C (DB/WB) Water inlet/outlet 12°C/7°C

# Heat pump TH-R290-S16-3P

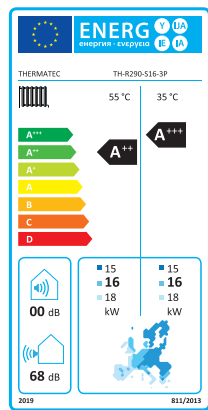

Energy label according to testing methods in line with the latest guidelines of the European Union directive from 11/2022:  
**PN-EN 14511: 2022**  
**PN-EN 14825: 2022**

**NEW 2023**



**R290**  
**SECOND GENERATION**



MODEL	TH-R290-S16-3P	
Power supply		380-415V / 3N~ / 50Hz
Input power	kW	16
Heating (A7/W35)	heating capacity range	kW 7.25 – 21.70
	input power	kW 1.50 – 5.88
	input current	A 2.82 – 9.16
	COP	kW/kW 3.69 – 4.83
Heating (A7/W55)	heating capacity range	kW 6.36 – 19.43
	input power	kW 2.15 – 6.85
	input current	A 3.71 – 10.60
	COP	kW/kW 2.84 – 2.96
Cooling (A35/W12)	cooling capacity range	kW 4.56 – 17.00
	input power	kW 1.85 – 7.31
	input current	A 2.99 – 11.26
SCOP average (THW at 35°C)	kWh/kWh	4.72
SCOP average (THW at 55°C)	kWh/kWh	3.65
Rated input power	kW	10.50
Rated input current	A	17
Refrigerant TYPE / CHARGE / GWP	- / kg / -	R290 / 1.4 / 3
CO <sub>2</sub> equivalent	TCO <sub>2</sub> eq	0.0042
Operation pressure (low side)	MPa	0.8
Operation pressure (high side)	MPa	3.0
Maximum allowable pressure	MPa	3.2
Electrical shockproof	Class	I
Ingress protection	IP	IPX4
Maximum outlet water temperature	°C	75
Operating ambient temperature	°C	-25 – 45
Water piping connections	cal	G1 ¼
Rated water flow	m <sup>3</sup> /h	2.75
Water pressure drop	kPa	55
Water pressure (min. – max.)	MPa	0.1 – 0.3
Sound pressure (1 m)	dB(A)	52
Net dimensions (L x W x H)	mm	1287 x 599 x 1704
Net weight	kg	265
Bracket	YES	integrated

**NOMINAL TEST CONDITIONS**

Heating (A7/W35): Outdoor temperature 7°C/6°C (DB/WB) Water inlet/outlet 30°C/35°C  
 Heating (A7/W55): Outdoor temperature 7°C/6°C (DB/WB) Water inlet/outlet 47°C/55°C  
 Cooling (A35/W12): Outdoor temperature 35°C/24°C (DB/WB) Water inlet/outlet 12°C/7°C

**CONTACT US**

Ultra-efficient heat pump system  
with high power from **50 kW** to **800 kW**

**PLUS C LINE**  
COMMERCIAL SOLUTIONS




Universal  
HYDRAULIC CABINETS



STAINLESS STEEL  
HOT WATER TANKS  
and BUFFER TANKS

DISTRIBUTOR'S STAMP



**THERMATEC | Home Star sp. z o.o.**  
Misjonarzy Oblatów MN 20A  
40-129 Katowice, Polska [Poland]

Office: (+48) 32 722 02 03  
Mobile Phone: (+48) 533 222 223  
biuro@thermatec.pl

[www.thermatec.eu](http://www.thermatec.eu) | [www.thermatec.pl](http://www.thermatec.pl) | [www.thermatec.cz](http://www.thermatec.cz) | [www.thermatec.fi](http://www.thermatec.fi) | [www.thermatec.nl](http://www.thermatec.nl)